



SILENCIADOR CIRCULAR SIN NÚCLEO - SCBT

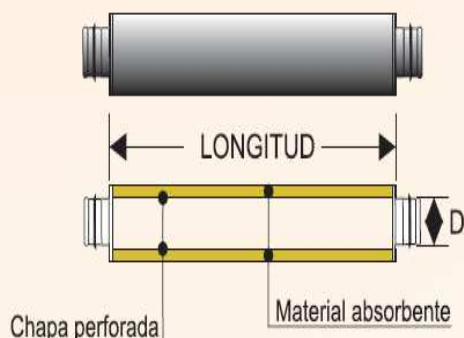

ATENUACIÓN ACÚSTICA (aislamiento de 100 mm) SCBT

TIPO	D	long(mm)	125Hz	250Hz	500Hz	1 KHz	2 KHz	4 KHz
SCBT 315	315	600	5	5	11	19	12	28
SCBT 315	315	900	7	9	16	30	18	14
SCBT 315	315	1200	9	12	21	36	18	17
SCBT 400	400	900	7	7	14	22	15	13
SCBT 400	400	1200	7	10	14	22	18	13
SCBT 500	500	900	6	8	14	16	13	13
SCBT 500	500	1200	8	11	22	24	17	16
SCBT 630	630	900	4	7	12	12	12	10
SCBT 630	630	1200	5	10	16	15	15	11
SCBT 800	800	1200	4	5	10	9	15	12

SILENCIADOR CIRCULAR CON NÚCLEO - SCBTN

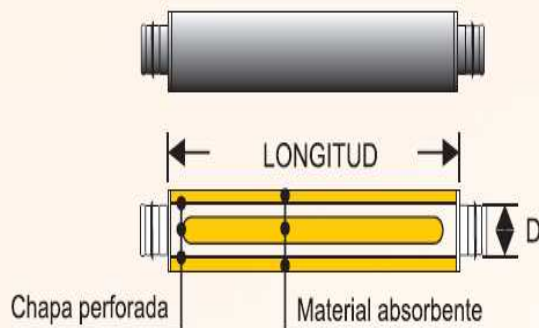

ATENUACIÓN ACÚSTICA (aislamiento de 100 mm) SCBTN (con núcleo)

TIPO	D	long(mm)	125Hz	250Hz	500Hz	1 KHz	2 KHz	4 KHz
SCBTN 315	315	900	11	18	26	37	40	28
SCBTN 315	315	1200	15	21	33	41	46	40
SCBTN 400	400	900	11	14	22	34	32	23
SCBTN 400	400	1200	11	21	30	38	43	28
SCBTN 500	500	900	8	12	19	27	21	19
SCBTN 500	500	1200	10	16	26	35	29	22
SCBTN 630	630	1200	8	11	23	38	23	19
SCBTN 800	800	1200	5	9	17	23	21	16
SCBTN 800	800	1500	5	12	19	26	23	18