





SILENCIADORES GENERICO



EMBOCADURAS




SOMBRERETES

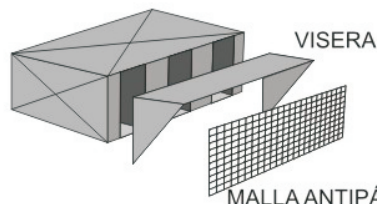

SBT-10								SBT-15								SBT-20							
Hz		Longitud mm.						Hz		Longitud mm.						Hz		Longitud mm.					
125	600	7	11	14	18	20	2100	125	600	6	8	12	13	13	13	125	600	4	6	9	12	12	13
250	900	13	19	27	32	39	45	250	900	10	16	23	25	27	31	250	900	9	12	17	22	23	25
500	1200	18	28	38	46	50	50	500	1200	16	25	34	40	48	50	500	1200	13	21	29	34	40	44
1 Kz	1500	22	35	46	50	50	50	1 Kz	1500	21	31	38	49	50	50	1 Kz	1500	18	25	35	38	48	50
2 Kz	1800	22	32	45	50	50	50	2 Kz	1800	17	26	30	40	48	50	2 Kz	1800	13	21	26	30	38	44


SILENCIADOR CIRCULAR SIN NÚCLEO - SCBT

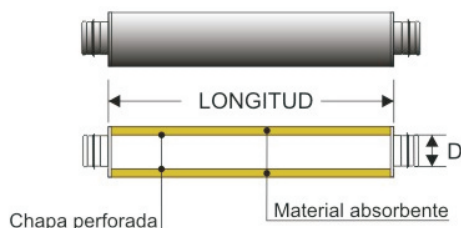

ATENUACIÓN ACÚSTICA (aislamiento de 100 mm) SCBT

TIPO	D	long(mm)	125Hz	250Hz	500Hz	1 KHz	2 KHz	4 KHz
SCBT 315	315	600	5	5	11	19	12	28
SCBT 315	315	900	7	9	16	30	18	14
SCBT 315	315	1200	9	12	21	36	18	17
SCBT 400	400	900	7	7	14	22	15	13
SCBT 400	400	1200	7	10	14	22	18	13
SCBT 500	500	900	6	8	14	16	13	13
SCBT 500	500	1200	8	11	22	24	17	16
SCBT 630	630	900	4	7	12	12	12	10
SCBT 630	630	1200	5	10	16	15	15	11
SCBT 800	800	1200	4	5	10	9	15	12

SILENCIADOR CIRCULAR CON NÚCLEO - SCBTN

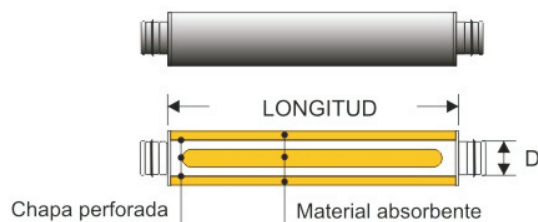

ATENUACIÓN ACÚSTICA (aislamiento de 100 mm) SCBTN (con núcleo)

TIPO	D	long(mm)	125Hz	250Hz	500Hz	1 KHz	2 KHz	4 KHz
SCBTN 315	315	900	11	18	26	37	40	28
SCBTN 315	315	1200	15	21	33	41	46	40
SCBTN 400	400	900	11	14	22	34	32	23
SCBTN 400	400	1200	11	21	30	38	43	28
SCBTN 500	500	900	8	12	19	27	21	19
SCBTN 500	500	1200	10	16	26	35	29	22
SCBTN 630	630	1200	8	11	23	38	23	19
SCBTN 800	800	1200	5	9	17	23	21	16
SCBTN 800	800	1500	5	12	19	26	23	18

Se fabrican en acero galvanizado, tanto la estructura exterior como la interior. El material del núcleo y el cuerpo de las celdillas, se fabrican en fibra mineral acabada en velo negro.